



## Double Bolt Hose Clamps

- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance.



### Without Saddles

Part No.	Hose OD mm
29	22 - 29
34	28 - 34
40	32 - 40
49	39 - 49
60	48 - 60
76	60 - 76
94	77 - 94

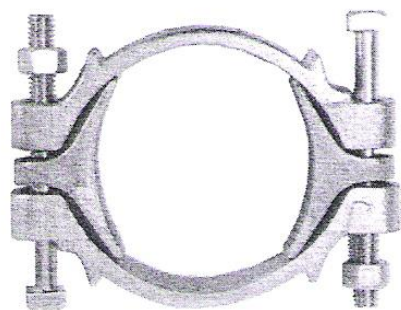

### With Saddles

Part No.	Hose OD	
	from	to
400	3-32/64"	3-52/64"
463	4-2/64"	4-18/64"
525	4-16/64"	4-60/64"
550	4-32/64"	5-16/64"
600	5-8/64"	5-44/64"
675	5-60/64"	6-32/64"
769	6-32/64"	7-36/64"
818	7-44/64"	8-12/64"
875	8-16/64"	8-56/64"
988	8-60/64"	9-56/64"
1125	9-60/64"	11-24/64"
1275	11-12/64"	13"
1450	13-12/64"	15"
1700	15-4/64"	17-32/64"

## KC Nipple

Material: SS 316, SS 304, Mild Steel,  
Other material on request.



Size	Part No.
1/2"	KC Nipple 050
3/4"	KC Nipple 075
1"	KC Nipple 100
1-1/4"	KC Nipple 125
1-1/2"	KC Nipple 150
2"	KC Nipple 200
2-1/2"	KC Nipple 250
3"	KC Nipple 300
4"	KC Nipple 400
5"	KC Nipple 500
6"	KC Nipple 600
8"	KC Nipple 800
10"	KC Nipple 1000
12"	KC Nipple 1200