

Heavy Duty Suction Hose

KLASFLEX

Heavy duty PVC Hose reinforced with an integral crush-resistant PVC helix. Optimum flow is maintained by smooth bore. Tough and extremely durable under normal operating conditions.

- Exceptionally tough and durable for heavy-duty industrial applications.
- Ideal for pumping and transferring of liquid, powder and granular material.
- Extensively used for suction and discharge - public utilities, drainage, ships, silos and irrigation plants.
- Suitable for oil and chemical resistance applications.

Product Code	Nominal Diameter (mm)	Inner Diameter (mm)	Outer Diameter (mm)	Working Pressure (kgf/cm ²)	Std Weight (kg/m)	Std Length (m)
SG050	50	50.8	61.8	8.0	1.25	20/30
SG065	65	63.5	69.5	8.0	1.75	20/30
SG075	75	76.2	88.2	6.5	1.90	20/30
SG090	90	89.0	95.5	5.0	2.50	20/30
SG100	100	101.6	115.6	5.0	3.30	20/30
SG125	125	127.0	143.0	5.0	4.20	20
SG150	150	152.4	170.4	3.0	6.00	20



Tolerance: + 1.5mm - 1.5mm


All technical are subject to \pm 5% tolerance

Spring Hose (wire reinforced hose)

Heavy-Duty Transparent PVC Hose reinforced with high tensile carbon steel helix. Excellent resistance to pressure vacuum and abrasion. Highly flexible to wide range of temperature.

- Suitable for oil and chemical resistance applications.
- Ideal for pumping and transferring of liquid, powder and granular material.
- Exceptionally tough and durable for heavy-duty and discharge - public utilities, drainage, ships, silos and irrigation plants.

Product Code	Inner Diameter (mm)	Outer Diameter (mm)	Working Pressure (kgf/cm ²)	Weight (g/m)	Coil Length (m)
SP015	16	22	6	245	100
SP019	19	26	5	335	50
SP025	25	33	5	525	50
SP032	32	41	4	775	40
SP038	38	48	4	925	40
SP050	51	62	3	1375	40
SP065	63	75	2	1765	20
SP075	76	91	2	2980	20
SP090	90	106	2	3700	10
SP100	102	118	2	4100	10

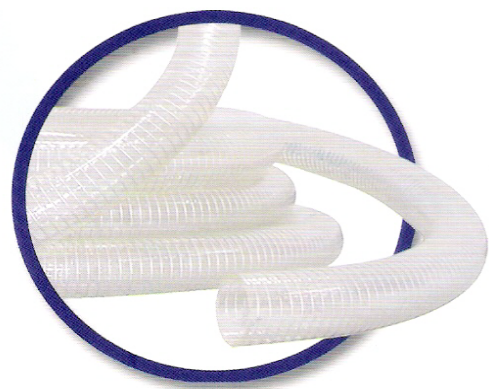

Internal diameter: + 2%

All technical are subject to + 5% tolerance