


PU Duct Hose

Lightweight and highly flexible polyurethane duct hose reinforced with rigid material helix. Minimum frictional loss achieved by smooth bore. Offers considerably longer life than PVC ducting due to increased abrasion resistance and mechanical strength.

- Excellent for conveyance applications requiring abrasion-resistance, flexibility and compressibility.
- Widely used in wood-working, electronic and other industrial applications.
- Ideal for air conveyance, fume extraction and other ventilation applications.
- Extensively used for conveying of light dust, fluff and small particles under low pressure or vacuum.

Product Code	Inner Diameter (mm)	Weight (g/m)	Bending Radius (mm)	Standard Length (m)
PUD 025	25.0	140	30	20
PUD 032	31.8	155	35	20
PUD 038	38.1	195	50	20
PUD 050	50.8	290	70	20
PUD 065	63.5	460	80	20
PUD 075	76.2	550	100	20
PUD 100	101.6	750	140	20
PUD 125	127.0	1100	170	20
PUD 150	152.4	1365	200	20

Tolerance: + 1.5mm - 1.5mm

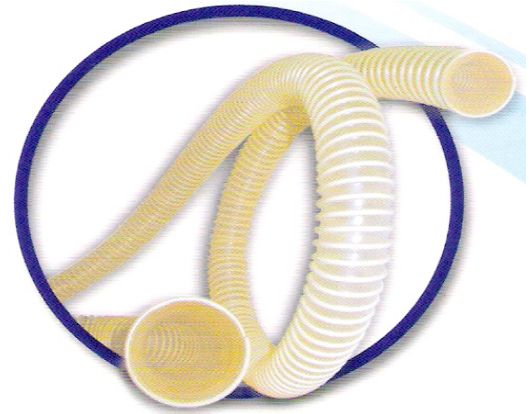

PVC Duct Hose

Flexible PVC Ducting hose reinforced with a continuous rigid material helix. Smooth bore provide frictional resistance.

- Extensively used in woodworking industries for dust collection purposes.
- Ideal for ventilation purposes, air conveyance and fume extractions.
- Performs well for conveying of dust and lightweight powders.

Product Code	Nominal Diameter (mm)	Inner Diameter (mm)	Outer Diameter (mm)	Standard Weight (kg/m)	Standard Length (m)
DH025	25	25.0	33.5	0.30	20/30
DH032	32	31.8	40.0	0.38	20/30
DH038	38	38.1	45.4	0.42	20/30
DH050	50	50.8	60.5	0.45	20/30
DH065	65	63.5	72.0	0.50	20/30
DH075	75	76.2	84.5	0.65	20/30
DH090	90	89.0	97.6	0.75	20/30
DH100	100	101.6	111.5	0.85	20/30
DH115	115	114.3	124.3	1.00	20/30
DH125	125	127.0	137.0	1.05	20/30
DH150	150	152.4	164.0	1.50	20/30
DH175	175	175.0	191.5	1.80	20
DH200	200	202.0	218.0	2.10	20
DH250	250	252.0	267.5	3.00	20
DH300	300	303.0	318.0	3.90	10

Tolerance: + 1.5mm - 1.5mm

